


FIELD-APPLIED SILICONE SEALANT BAND AND CORNER BEADS FORCED DOWN ALONG SIDE OF EMSHIELD DFR2 AS SHOWN - BOTH SIDES (SILICONE SUPPLIED BY EMSSEAL)

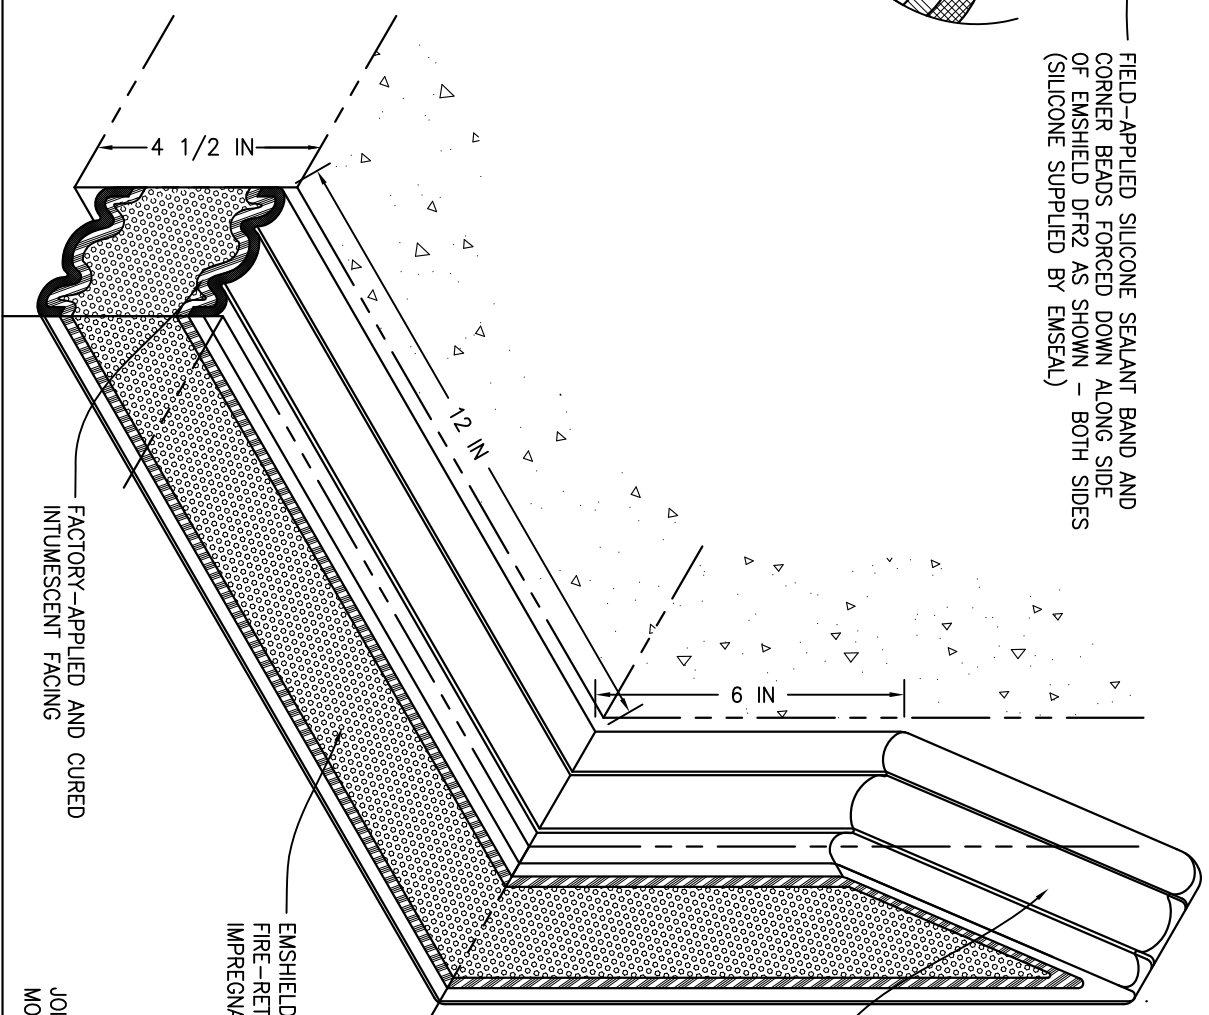

FACTORY-APPLIED AND CURED INTUMESCENT FACING

EMSHIELD DFR2 FIRE-RETARDANT IMPREGNATED FOAM

FACTORY-APPLIED AND CURED TRAFFIC-GRADE SILICONE FACING (PECORA 301)

JOINT GAPS FROM 1 TO 4 INCHES (25-100mm) MOVEMENT: ±25% (TOTAL 50%) OF NOMINAL MATERIAL SIZE

EMSEAL JOINT SYSTEMS LTD.

VERTICAL PLANE INSIDE UNIVERSAL-90 W/45° TERMINATION

EMSEAL'S EMSHIELD DFR2 HAS BEEN TESTED IN ACCORDANCE WITH UL 2079 IN THE CONFIGURATION DEPICTED IN UL SYSTEM # FT-D-1086. USE OF THIS MATERIAL IN DECK ASSEMBLY CONFIGURATIONS OTHER THAN DEPICTED IN UL SYSTEM # FT-D-1086 WILL NOT ENCUMBER OR LOWER THE RESISTANCE OF THE DECK BUT IS DONE SO AT THE DESIGNERS' DISCRETION AND RESPONSIBILITY FOR DESIGN OF A FIRE RATED DECK ASSEMBLY THAT MEETS APPLICABLE STANDARDS FOR THE PROJECT.

A	07/13/09	TAB	GENERAL REVISIONS
---	----------	-----	-------------------

THIS DOCUMENT CONTAINS INFORMATION OF A CONFIDENTIAL NATURE UNLESS OTHERWISE SPECIFIED. IT IS THE PROPERTY OF EMSEAL CORPORATION. ANY UNAUTHORIZED USE WILL BE PROSECUTED. THIS FORM IS PROTECTED BY COPYRIGHT. THE RIGHT TO REPRODUCE IN ANY FORM BEING THE EXCLUSIVE RIGHT OF EMSEAL CORPORATION. ANY UNAUTHORIZED REPRODUCTION WHETHER IN TWO OR THREE DIMENSIONS WILL BE PROSECUTED.

DRAWN BY:	DATE:	SCALE:	SHEET
TAB	11/15/09	N.T.S.	No. 1 OF 1
PART NUMBER:	FOAM\EMSHIELD\DFR2\		
EMSHIELD DFR2 INSIDE 45 DEG TERMINATION U-90 - 001			