


30 ANCHORS TOTAL PER
13.12 LF (4m) LENGTH
(15 ANCHORS EACH SIDE)

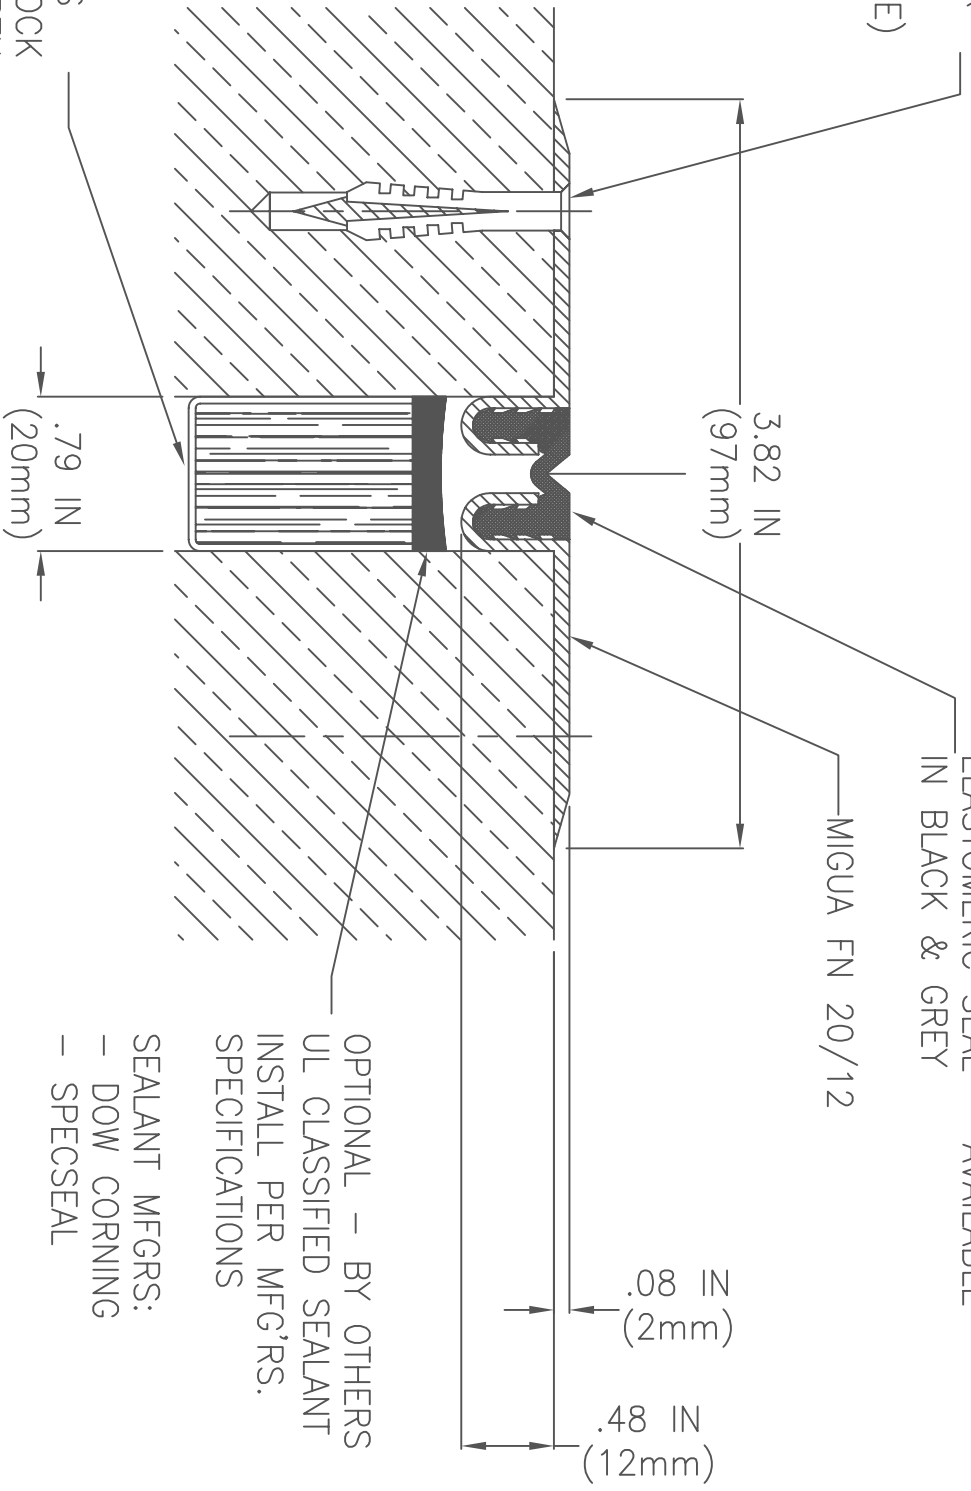

ELASTOMERIC SEAL - AVAILABLE
IN BLACK & GREY

MIGUA FN 20/12

3.82 IN
(97mm)

\approx .08
(2mm)

.48 IN
(12mm)

.79 IN
(20mm)

OPTIONAL - BY OTHERS
MULTI-LAYER ULTRA BLOCK
INSTALL TO PROPER DEPTH
PER MFG'R'S. SPECIFICATIONS
FOR PROPER FIRE RATING.

OPTIONAL - BY OTHERS
UL CLASSIFIED SEALANT
INSTALL PER MFG'RS.
SPECIFICATIONS

SEALANT MFGRS:
- DOW CORNING
- SPECSEAL

MOVEMENT = + .12 IN (3mm)
- .12 IN (3mm)

CD-ROM VERSION 3 FILENAME: FN2012SurfaceMounted

EMSEAL JOINT SYSTEMS LTD.

MIGUA FN 20/12 INTERIOR JOINT

C:\DETAILS\MIGUA\FN\20\

THIS DOCUMENT CONTAINS INFORMATION OF A CONFIDENTIAL NATURE UNAVAILABLE TO THE PUBLIC AND IS PROPRIETARY TO EMSEAL CORPORATION. ANY UNAUTHORIZED USE, WILL BE PROSECUTED. REPRODUCTION IN ANY FORM BEING THE EXCLUSIVE RIGHT OF EMSEAL CORPORATION. ANY UNAUTHORIZED REPRODUCTION WHETHER IN TWO OR THREE DIMENSIONS WILL BE PROSECUTED.

DRAWN	DATE:	SCALE:	SHEET
BY: WAJ	2/13/98	N.T.S.	No:
PART NUMBER:	001-0-00-00		